

Lighting Control Software



Features

- Integration of digitized two-wire lighting fixtures for remote controllability.
- Transmission control via LAN or serial interface.
- Supporting multi-loop control.
- Scheduling an appointment control.
- Supporting setting and operation of multiple scene modes, demo version at most 18 scenes.
- Provide floor plan switch control.
- The vista version supports schedule control and up to 100 scenes.
- Can control single lamp or single loop switch.
- Set energy saving mode and provide statistics of electricity consumption.


Applications

- Host machine for smart building control.
- Host for automatic remote control.
- Control host for industrial plants and machines.
- Host for energy monitoring and security protection.

System Requirements

- CPU: 1GHz dual-core 32- or 64-bit
- Operating system: Windows XP/7
- SDRAM: ≥ 64MB
- Storage capacity: ≥ 40GB
- Ethernet interface: 10M/100M
- Serial COM port (RS-232 or RS-485)
- Libraries: Qt5, SQLite3

Software Architecture

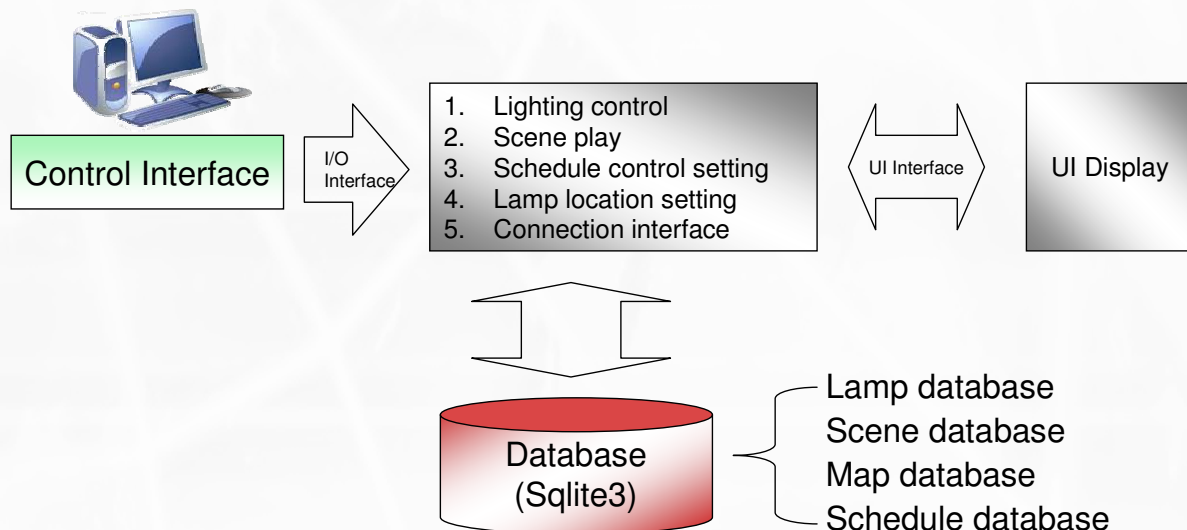

Model List

Model	Operating System	Version	Function
AO-1403S (Demo)	Windows XP/7	1.7.30	Modern Lighting Housekeeper for Windows
AO-1403S (Vista)	Windows XP/7	1.7.30	Modern Lighting Housekeeper for Windows